
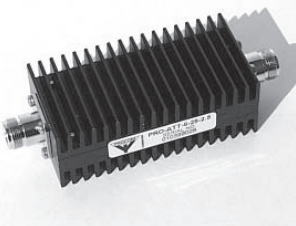


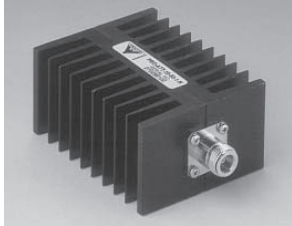
## Koaxiale Dämpfungsglieder, Attenuators

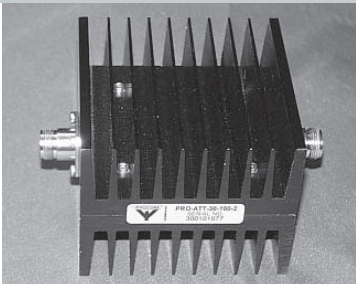
- geringe Dämpfungstoleranz
- kapazitätsarme Chipwiderstände



1 Watt, 1 GHz, N-Norm, 50 Ω,	Type:	Dämpfung	Art.Nr.
	PRO-ATT-3-1-1-N	3 dB	P3150
	PRO-ATT-10-1-1-N	10 dB	P3149
<b>Maße: Ø 21 mm x 69 mm; Gewicht ca. 80 g</b>			

25 Watt, 2,5 GHz, N-Norm, 50 Ω,	Type:	Dämpfung	Art.Nr.
	PRO-ATT-1-25-2-N	1 dB	P3152
	PRO-ATT-3-25-2-N	3 dB	P3153
	PRO-ATT-6-25-2-N	6 dB	P3154
	PRO-ATT-9-25-2-N	9 dB	P3155
	PRO-ATT-10-25-2-N	10 dB	P3156
	PRO-ATT-20-25-2-N	20 dB	P3157
	PRO-ATT-30-25-2-N	30 dB	P3158
<b>Maße: 50 mm x 36 mm x 138 mm; Gewicht ca. 340 g</b>			

50 Watt, 2 GHz, N-Norm, 50 Ω,	Type:	Dämpfung	Art.Nr.
	PRO-ATT-1-50-2-N	1 dB	P3159
	PRO-ATT-3-50-2-N	3 dB	P3169
	PRO-ATT-6-50-2-N	6 dB	P3161
	PRO-ATT-10-50-2-N	10 dB	P3162
	PRO-ATT-20-50-2-N	20 dB	P3163
	PRO-ATT-30-50-2-N	30 dB	P3164
<b>Maße: 50 mm x 80 mm x 138 mm; Gewicht ca. 560 g</b>			

100 Watt, 2 GHz, N-Norm, 50 Ω,	Type:	Dämpfung	Art.Nr.
	PRO-ATT-10-100-2-N	10 dB	P3165
	PRO-ATT-20-100-2-N	20 dB	P3166
	PRO-ATT-30-100-2-N	30 dB	P3167
<b>Maße: 80 mm x 100 mm x 138 mm; Gewicht ca. 1100 g</b>			